


RANDOM SEALERS

AUTO-ADJUSTING CASE SEALERS FOR RANDOM CASES



RS3000
RS Series Random Case Sealer

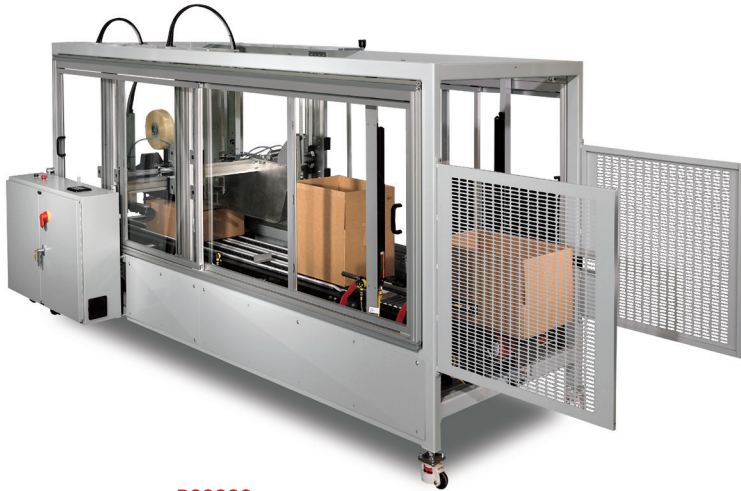

TBS-100RH
Random Height Case Sealer

RANDOM SEALERS

SPECIFICATIONS	RS2000LD	RS2000SB	RS3000LD	RS3000SB	TBS-100RH	TBS-100R
Max. Speed	20 CPM	20 CPM	15 CPM	15 CPM	20-30 CPM	10-20 CPM
Max. Case Range	24" x 16" x 16"	24" x 16" x 16"	28" x 22" x 22"	28" x 22" x 22"	24" x 16" x 18"	24" x 16" x 18"
Min. Case Range	10" x 8" x 6"	10" x 5" x 6"	10" x 8" x 6"	10" x 5" x 6"	8" x 6" x 5"	8" x 6" x 5"
Case Modification Available	Y	Y	Y	Y	Y	Y
Glue Option	N	N	N	N	N	N
Washdown Option	N	N	N	N	IP54	IP54
Std. Voltage	240V/3PH	240V/3PH	240V/3PH	240V/3PH	240V/3PH	240V/3PH
SCFM - 80 PSI - 3/4 Supply Line	4 SCFM	2 SCFM	3 SCFM	3 SCFM	5 SCFM	5 SCFM
Footprint	16'11" x 5'7" x 6'1"	16'3" x 5'9" x 6'4"	18'11" x 5'9" x 6'4"	18'11" x 5'10" x 7'1"	5'5" x 4'4" x 5'6"	9'6" x 4'11" x 6'4"
Approx. Shipping Weight	~2500 lbs.	~2500 lbs.	~3500 lbs.	~3500 lbs.	~1200 lbs.	~1200 lbs.
Std. Finish	Steel Plus 316 is a two component, water base epoxy filled with 316 stainless steel flake. Finish Color is a Steel-It Grey and is USDA and FDA accepted.					
Controls	AB COMPACT LOGIX PLC with PV+ Color TS					
Available Options	Low Tape, Casters, Stack Lights, Elevation Kits, Bar Code Readers, Spare Parts					