


# CASE SEALERS

## TOP AND BOTTOM CASE SEALERS



**TBS-100 SA SEMI-AUTOMATIC**  
Sanitary Top & Bottom Case Sealer w/ leg extensions

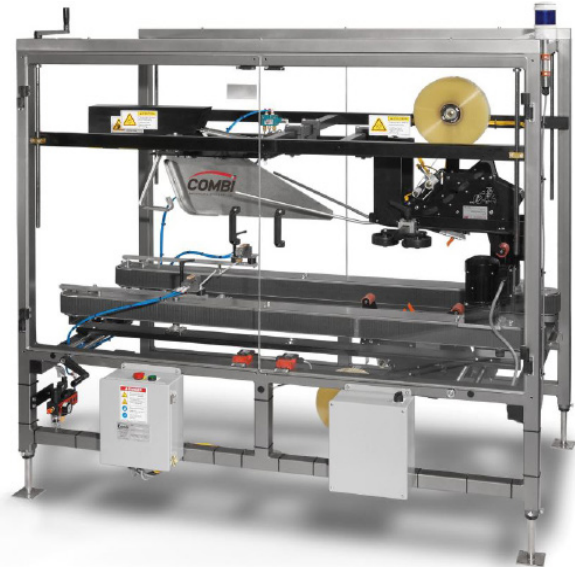

**TBS-100**  
Automatic Top & Bottom Case Sealer

### CASE SEALER MODELS

SPECIFICATIONS	TBS-100 SA	TBS-100	TBS-100 HS	TBS-100 XL	TBS-300 G	TBS-500
Max. Speed	20 CPM	20 CPM	50 CPM	20 CPM	50 CPM	8 CPM
Max. Case Range	20" x 16" x 20"	20" x 16" x 20"	24" x 20" x 24"	24" x 20" x 24"	26" x 20" x 20"	42" x 30" x 42"
Min. Case Range	5" x 5" x 5"	5" x 5" x 5"	5" x 5" x 5"	5" x 5" x 5"	5" x 5" x 5"	16" x 11" x 10"
Case Modification Available	Y	Y	Y	Y	Y	Y
Glue Option	N	N	Y	Y	STD	Y
Washdown Option	IP54 / IP69K	IP54 / IP69K	IP54 / IP69K	IP54 / IP69K	IP54 / IP69K	IP54 / IP69K
Std. Voltage	120V/1PH	120V/1PH	120V/1PH	120V/1PH	240V/3PH	120V/1PH
SCFM - 80 PSI - 3/4 Supply Line	.85 SCFM	.85 SCFM	.85 SCFM	2.14 SCFM	3.47 SCFM	2.14 SCFM
Footprint	3'4" x 3'8" x 5'4"	5'2" x 4'7" x 5'6"	5'2" x 4'7" x 5'6"	6'5" x 5' x 5'10"	11'1" x 5'8" x 5'8"	8'3" x 4'5" x 6'5"
Approx. Shipping Weight	~1100 lbs.	~1100 lbs.	~1100 lbs.	~1200 lbs.	~1500 lbs.	~1500 lbs.
Std. Finish	Steel Plus 316 is a two component, water base epoxy filled with 316 stainless steel flake. Finish Color is a Steel-It Grey and is USDA and FDA accepted.					
Controls	PB STATION - (AB Micro Logix PLC w/Alarms -AB Compact Logix PLC and AB PV+ TS w/ Glue)					
Available Options	Overstuffed Case, Low Tape/Glue, Casters, Stack Lights, Elevation Kits, Spare Parts					